


# **Product Datasheet**

## 10101L/B/W

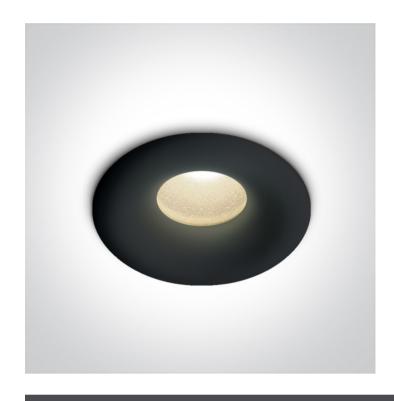

1W Recessed Star Light LED spot, IP44.

Requires 350mA driver. Driver cannot pass through the cut-out hole.

Complies with standard EN60598-1 and any other specific standards.



### Downloads










### Dimensions



### Must be ordered separately







89004T

### Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The Super Mini Series
Order Code	10101L/B/W
Colour	Black
Material	Aluminium
Shape	Circular

Height	21mm
Diameter	16mm
Cutout Hole Diameter	12mm
Recessed Ceiling	Yes
Recessed wall	Yes
Depth Required	30mm
Indoor	Yes
Adjustable	No

### Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	350mA
Safety Class	
Power(Watts)	1W
IP Rating	IP44
Light Source	LED built in
LED Brand	Bridgelux
Cable Length	100cm
F Mark	F

# Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram 3000K 95lm 90

### Packing Info

Box Length	6,5cm
Box Width	6,5cm
Box Height	4,5cm
Box Weight	0.040kg
Pcs/Carton	100
Barcode	5291889060963
HS Code	9405413990

### Certification & Warranty

Warranty 3 years

